



Item No.	TSP0000063D	Date	01.01.2017
		Revision	00
Description	M30, Inductive , AC 2-Wire with Cable termination	Page	1 of 3

M30x1.5 Flush - Cable Type

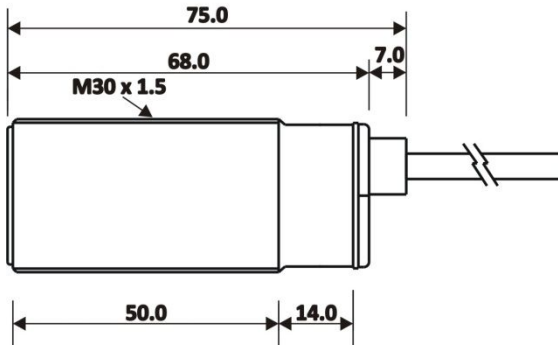

M30x1.5 Non Flush - Cable Type

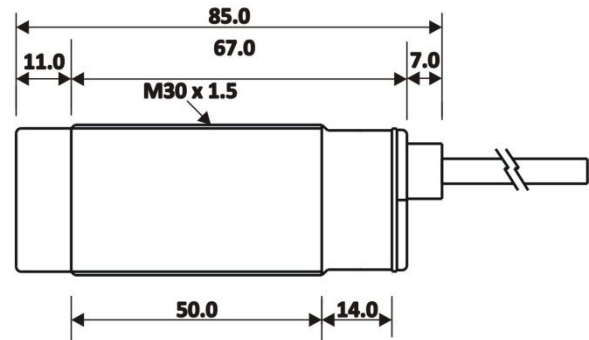

All dimensions are in mm.

Table-1

M30x1.5 AC 2 WIRE

O/P Logic	Mounting	Sensing Distance(Sn)	Termination Type	Katlax Article No.
NO	FLUSH	10 mm	CABLE	IBF10-30B6-AOW02
NO	NON FLUSH	15 mm	CABLE	IBN15-30B6-AOW02
NC	FLUSH	10 mm	CABLE	IBF10-30B6-ACW02
NC	NON FLUSH	15 mm	CABLE	IBN15-30B6-ACW02



Specifications are subject to change without notice.

Item No.	TSP0000063D	Date	01.01.2017
		Revision	00
Description	M30, Inductive , AC 2-Wire with Cable termination	Page	2 of 3

Table-2

TECHNICAL SPECIFICATIONS


Operating Voltage	85-270 VAC	
Sensing Distance (Sn)	10.0 mm - Flush	
	15.0 mm - Non flush	
Hysteresis	3-15% of Sn	
Standard target	(30x30x1)mm Fe/St-37	
Correction factor	Mild Steel	1.00
	Stainless steel	0.80
	Brass	0.50
	Aluminum	0.45
	Copper	0.40
Voltage Drop	< 8.5V AC	
No Load Current	< 15 mA	
Max. Load Current	400 mA	
Switching Frequency	15 Hz - Flush	
	10 Hz - Non Flush	
Reverse Polarity Protection	YES	
Short Circuit Protection	NO	
Housing Material	Brass(Ni Plated)	
Sensing Face Material	P.B.T.	
Termination	Cable (2 x 0.44 sqmm.) , 2 mtr	
Temperature Range	-25°C....75°C	
Environmental Protection	IP67	




Specifications are subject to change without notice.

Item No.	TSP0000063D	Date	01.01.2017
		Revision	00
Description	M30, Inductive , AC 2-Wire with Cable termination	Page	3 of 3

AC - NO

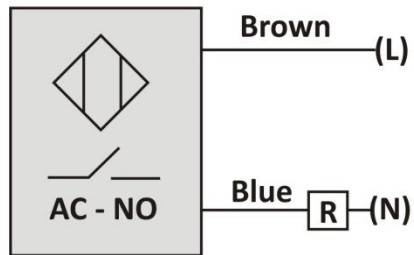

AC - NC

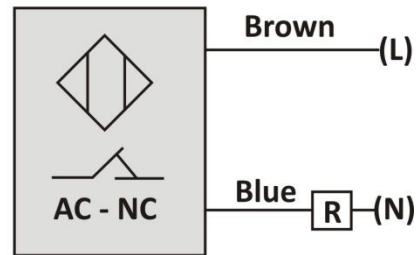

Specifications are subject to change without notice.