


M36 DC INDUCTIVE PROXIMITY SWITCH / SENSOR

15mm/20mm
FLUSH / NONFLUSH

OPERATIONAL DATA:

1. MOUNTING IN METAL	FLUSH / NON-FLUSH
2. SENSING DISTANCE with Fe/ST37 36mm X 36mm X 1mm	15mm(FLUSH) 20mm(NON-FLUSH)
3. HYSTERESIS	3% TO 15%
4. REPEATABILITY	0.01mm
5. TEMPERATURE DRIFT	< 10%
6. AMB. TEMP. RANGE	0 DEG.C. TO 70 DEG.C.

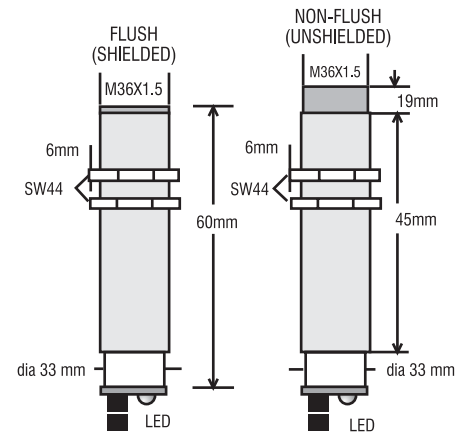

ELECTRICAL DATA:

7. OPERATING VOLTAGE	10 V TO 30 VDC
8. CURRENT CONSUMPTION	< 20 mA
9. DROPOUT VOLTAGE	< 1V @ max load current
10. SWITCHING FREQUENCY	400 Hz
11. LOAD CURRENT (MAXIMUM)	200mA / 400mA

ORDERING CODE:

TYPE

PSIBB36PAFOCB02RS	PNP/NO/200mA/FLUSH
PSIBB36PAFCCB02RS	PNP/NC/200mA/FLUSH
PSIBB36PBFOCB02RS	PNP/NO/400mA/FLUSH
PSIBB36PBFCCB02RS	PNP/NC/400mA/FLUSH
PSIBB36PANOCB02RS	PNP/NO/200mA/NONFLUSH
PSIBB36PANCCB02RS	PNP/NC/200mA/NONFLUSH
PSIBB36PBNOCB02RS	PNP/NO/400mA/NONFLUSH
PSIBB36PBNCCB02RS	PNP/NC/400mA/NONFLUSH
PSIBB36NAFOCB02RS	NPN/NO/ 200mA/FLUSH
PSIBB36NAFCCB02RS	NPN/NC/ 200mA/FLUSH
PSIBB36NBFOCB02RS	NPN/NO/400mA/FLUSH
PSIBB36NBFCCB02RS	NPN/NC/400mA/FLUSH
PSIBB36NANOCB02RS	NPN/NO/200mA/NONFLUSH
PSIBB36NANCCB02RS	NPN/NC/200mA/NONFLUSH
PSIBB36NBNOCB02RS	NPN/NO/400mA/NONFLUSH
PSIBB36NBNCCB02RS	NPN/NC/400mA/NONFLUSH

MECHANICAL DATA:

12. HOUSING	M36 X 1.5mm THREADED BRASS BARREL Ni-CHROME PLATED
13. MOUNTING	36mm THRU HOLE FIXING BY M36 X1.5mm TAPPED PAIR OF NUTS
14. TERMINATION	Cu CABLE PVC INSULATED 3X0.34 Sq.mm.

* please contact factory for
different barrel lengths.




PROTECTION FEATURES:

15. ENVIRONMENTAL	IP67 (tested & certified by CMRI, Dhanbad.)
16. POLARITY REVERSAL	YES
17. OUTPUT	AGAINST INDEFINITE SHORT CIRCUIT

CONNECTION DETAILS:

BROWN	+V
BLACK	OUTPUT
BLUE	0 V

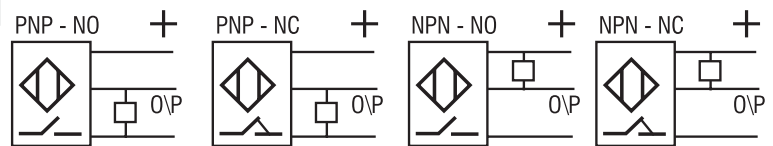

Specifications are subject to change without notice.